

Guide rail clamps

Technopolymer

MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

STANDARD EXECUTIONS

AISI 304 stainless steel cylindrical head screws with hexagon socket, nickel-plated brass nuts.

- **MPG-T**: for both the standard trapezoidal guides.
- **MPG-C**: for round guide.
- **MPG-R**: for rectangular guide.



FEATURES AND APPLICATIONS

MPG-T execution can be used with the side guides having an AISI 304 stainless steel bracket of thickness 1.5 or 2 mm.



ASSEMBLY INSTRUCTIONS

- Mount the guide rail clamp on the support bar (dimension 25x8 mm), the assembly consists in inserting the bar into the specific clamp slot (Fig.1).
- Insert the guide into the clamp housing and then clamp the screws (Fig.2).
- Set the height of the clamp and clamp by means of a M8 screw, not supplied (Fig.3).

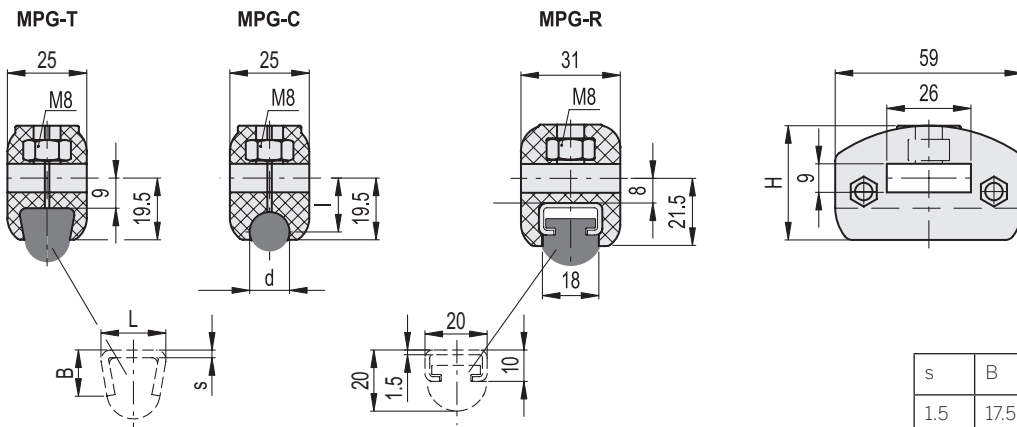

| s | B | L |
|-----|------|----|
| 1.5 | 17.5 | 16 |
| 2 | 18 | 17 |

STAINLESS STEEL

| Code | Description | d | H | l | ⚖ |
|--------|-------------|----|----|----|----|
| 419688 | MPG-T | - | 36 | - | 46 |
| 419749 | MPG-C-8 | 8 | 36 | 16 | 44 |
| 419788 | MPG-C-10 | 10 | 36 | 15 | 45 |
| 419687 | MPG-C-12 | 12 | 36 | 15 | 46 |
| 419787 | MPG-C-14 | 14 | 36 | 15 | 47 |
| 419698 | MPG-R | - | 38 | - | 50 |